


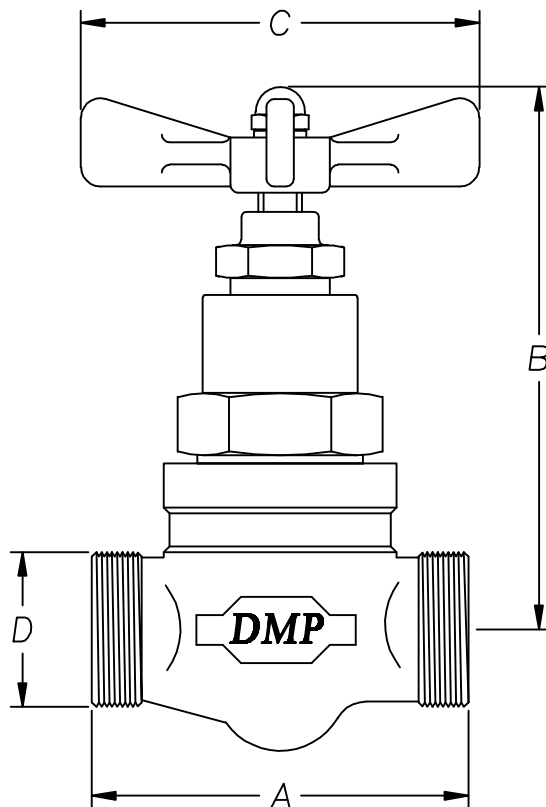

M2036 INLINE GLOBE SHUTOFF VALVE

	PIPE SIZE	CAT NO.	A	B CLOSED	C	D THREAD	APPROX LIFT	FLOW DIA.
*	1/8	M2036-0	2 3/4	3 3/4	3 1/2	1"-14	3/16	7/32
*	1/4	M2036-1	3 3/8	4 1/16	3 1/2	1 3/16-12	11/32	5/16
*	3/8	M2036-2	4"	4 7/8	3 1/2	1 3/8-12	7/16	7/16
*	1/2	M2036-3	4 1/4	6 1/8	4 1/2	1 3/4-12	17/32	1/2
*	3/4	M2036-4	4 5/8	6 3/16	5 1/4	2"-12	9/16	5/8
*	1"	M2036-5	5 1/4	7 9/16	7 1/4	2 5/16-12	19/32	13/16
*	1 1/4	M2036-6	6 1/2	7 5/8	9"	2 3/4-12	19/32	1"
**	1 1/2	M2036-7	9"	10"	11 1/2	3 1/16-12	1"	1 1/4
**	2"	M2036-8	9 1/2	10 3/8	14"	3 3/4-12	1"	1 9/16

ALL DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


* QUALIFIED TO QPL-24109 I/A/W MIL-V-24109.

** CENTER LINE OF VALVE STEM IS ANGLED APPROXIMATELY 12° FROM THE PERPENDICULAR TO THE PIPING.

FOR CARTRIDGE INFORMATION SEE CAT NO. M236

OFFSET AND ANGLE BODY CONFIGURATIONS AVAILABLE.

FOR ADDITIONAL TECHNICAL INFORMATION SEE "ABOUT" SECTION OF OUR SITE.



"GET THE CONNECTION"
DERBYSHIRE MARINE PRODUCTS, LLC.
HARLEYSVILLE, PA. 19438 U.S.A.

TEL: 267-222-8900, FAX: 267-222-8865

Web: www.derbyshiremp.com