


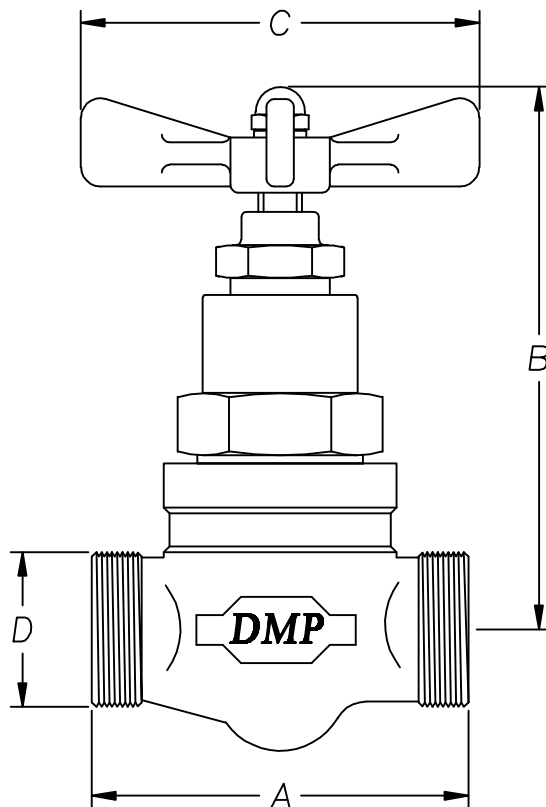

M2056 INLINE GLOBE STOPCHECK VALVE

	PIPE SIZE	CAT NO.	A	B CLOSED	C	D THREAD	APPROX LIFT	FLOW DIA.
*	1/8	M2056-0	2 3/4	3 3/4	3 1/2	1"-14	3/16	7/32
*	1/4	M2056-1	3 3/8	4 1/16	3 1/2	1 3/16-12	11/32	5/16
*	3/8	M2056-2	4"	4 7/8	3 1/2	1 3/8-12	7/16	7/16
*	1/2	M2056-3	4 1/4	6 1/8	4 1/2	1 3/4-12	17/32	1/2
*	3/4	M2056-4	4 5/8	6 3/16	5 1/4	2"-12	9/16	5/8
*	1"	M2056-5	5 1/4	7 9/16	7 1/4	2 5/16-12	19/32	13/16
*	1 1/4	M2056-6	6 1/2	7 5/8	9"	2 3/4-12	19/32	1"
**	1 1/2	M2056-7	9"	10"	11 1/2	3 1/16-12	1"	1 1/4
**	2"	M2056-8	9 1/2	10 3/8	14"	3 3/4-12	1"	1 9/16

ALL DIMENSIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


* VALVE DESIGN CONSISTANT WITH REQUIREMENTS OF MIL-V-24109.

** CENTER LINE OF VALVE STEM IS ANGLED APPROXIMATELY 12° FROM THE PERPENDICULAR TO THE PIPING.

FOR CARTRIDGE INFORMATION SEE CAT NO. M256

OFFSET AND ANGLE BODY CONFIGURATIONS AVAILABLE.

FOR ADDITIONAL TECHNICAL INFORMATION SEE "ABOUT" SECTION OF OUR SITE.



"GET THE CONNECTION"
DERBYSHIRE MARINE PRODUCTS, LLC.
HARLEYSVILLE, PA. 19438 U.S.A.

TEL: 267-222-8900, FAX: 267-222-8865

Web: www.derbyshiremp.com